

# GRAS 40PP

CCP Free-field QC Microphone



Freq range: 10 Hz to 20 kHz  
Dyn range: 32 dB(A) to 128 dB  
Sensitivity: 50 mV/Pa

---

The GRAS 40PP Production-Line Test Microphone is a robust, cost-effective microphone designed for use in production-line testing of loudspeakers and acoustic transducers. It has a wide frequency range reaching up to 20 kHz and a large dynamic range from <32 dB(A) to 128 dB.

## Typical applications and use

- Production-line testing of drivers, receivers, and microspeakers
- Sound-scape recording in array configurations
- Multichannel measurements (analysis)

## Design

The cost-effectiveness of the 40PP is a key consideration when setting up multiple production lines. Close manufacturing tolerances provide the 40PP with a high degree of interchangeability – a major advantage when used in production-line test setups.

The robust standard BNC connector of the 40PP ensures an easy-to-handle setup and supports the use of standard RG58 cables all the way from the microphone to the input module.

The integrated CCP (Constant Current Power) preamplifier requires a constant-current power supply, such as the [GRAS 12AL](#) 1-Channel CCP Power Module with A-Weighting filter, or any other CCP compatible power supply or input module. The built-in TEDS (Transducer Electronid Data Sheet, according to IEEE 1451.4) chip provides information about the microphone that can be used by systems designed for use with TEDS.

## Microphone Calibration


Calibration is easy with a GRAS pistonphone, such as the [GRAS 42AA](#), together with a ¼" microphone adapter.

Before leaving the factory, GRAS products are tested and calibrated by GRAS, and an individual test certificate is included with the product.

GRAS Sound & Vibration continually strives to improve the quality of our products for our customers; therefore, the specifications and

accessories are subject to change.

Frequency range ( $\pm 1$ dB)	Hz	20 to 10 k
Frequency range ( $\pm 2$ dB)	Hz	10 to 20 k
Dynamic range lower limit (microphone thermal noise)	dB(A)	<32
Dynamic range upper limit	dB	128
Set sensitivity @ 250 Hz ( $\pm 2$ dB)	mV/Pa	50
Power supply (Constant Current Power)	mA	2 to 20
Microphone venting		Front
Output impedance	$\Omega$	<50
Temperature range, operation	$^{\circ}\text{C}$ / $^{\circ}\text{F}$	-10 to 50 / 14 to 122
Temperature range, storage	$^{\circ}\text{C}$ / $^{\circ}\text{F}$	-40 to 85 / -40 to 185
Influence of axial vibration @1 m/s <sup>2</sup>	dB re 20 $\mu\text{Pa}$	50
TEDS UTID (IEEE 1451.4)		27 v. 1.0
Connector type		BNC
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Weight	g / oz	5.5 / 0.19401

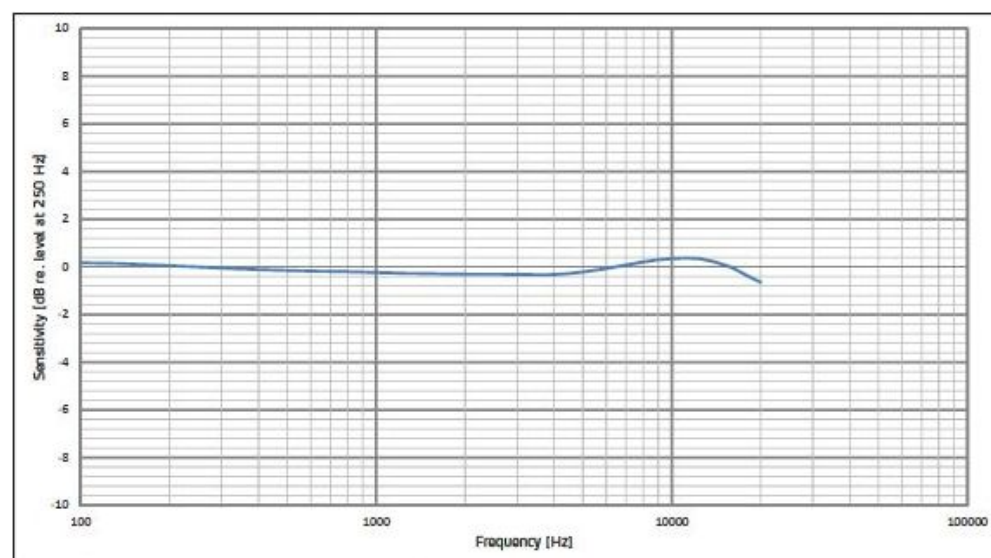


*Typical frequency response*

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.



Dimensions in mm

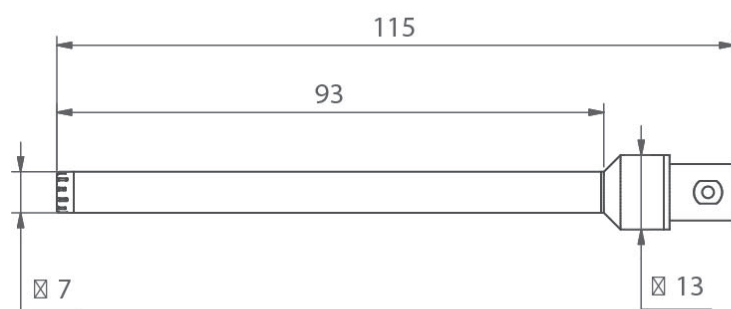

GS0528  
40PP



## Optional items

<a href="#">GRAS AA0039-CL</a>	BNC to BNC 50 $\Omega$ extension cable, customized length
<a href="#">GRAS 12AL</a>	1-Channel CCP Power Module with A-weighting filter
<a href="#">GRAS AL0028</a>	Tripod adapter
<a href="#">GRAS RA0092</a>	Rain-protection Cap for array microphones
<a href="#">GRAS 42AP</a>	Intelligent Pistonphone, Class 0
<a href="#">GRAS 42AG</a>	Multifunction Sound Calibrator, Class 1

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.



# | We Make Microphones

## Tradition

Since the establishment in 1994, GRAS has been 100% dedicated to developing and manufacturing high-quality measurement microphones and related acoustic equipment.

## Innovation

We work with everybody with an interest in sound or noise within the fields of aerospace, automotive, audiology, consumer electronics, noise monitoring, building acoustics and telecommunications.

## Quality

At GRAS we know that in order for you to trust your measurement results; signal quality, stability and robustness are essentials. We design and build them to perform under real life conditions – and beyond.

