

GRAS 67AX

ø400 mm CCP Ground Array
Microphone Kit



Freq range: 3.15 Hz to 20 kHz
Dyn range: 22 dB(A) to 150 dB
Sensitivity: 12.5 mV/Pa

The GRAS 67AX ½" CCP Ground Array Microphone Set consists of a ½" precision pressure microphone with built-in CCP preamplifier, a ø400 mm mounting plate, and an adapter for a BNC cable.

Typical applications and use

- Ground array measurements
- General noise measurements
- Ideal for the aerospace industry


Design

The 67AX is a ground array microphone kit designed for the aerospace industry, i.e. for measurement of noise from overhead aircraft.

The microphone set is designed to sit asymmetrically in the mounting to attain a more uniform frequency response for measurements.

The [GRAS 47AX](#) microphone is a IEC 61094 1/2" CCP Flush-mount Microphone Set with a dynamic range from 22 dB to 150 dB and a frequency range from 3.15 Hz to 20 kHz. Its height of only 8 mm (to the diaphragm) is the ideal match for the design of the 67AX. The built-in preamplifier is a low noise constant current power (CCP) type, with a built-in TEDS circuit for automatic transducer identification.

Frequency range (± 1 dB)	Hz	5 to 12.5 k
Frequency range (± 2 dB)	Hz	3.15 to 20 k
Dynamic range lower limit (microphone thermal noise)	dB(A)	22
Dynamic range upper limit	dB	150
Dynamic range upper limit with GRAS CCP preamplifier	dB	149
Set sensitivity @ 250 Hz (± 2 dB)	mV/Pa	12.5
Microphone venting		Rear
Output impedance	Ω	<50
Temperature range, operation	$^{\circ}\text{C}$ / $^{\circ}\text{F}$	-30 to 70 / -22 to 158
Temperature range, storage	$^{\circ}\text{C}$ / $^{\circ}\text{F}$	-40 to 85 / -40 to 185
Static pressure coefficient @250 Hz	dB/kPa	-0.008
Humidity range non condensing	% RH	1 to 100
Humidity coefficient @250 Hz	dB/% RH	< 0.1
Influence of axial vibration @1 m/s ²	dB re 20 μPa	66
TEDS UTID (IEEE 1451.4)		27 v. 1.0
Connector type		BNC
CE/RoHS compliant/WEEE registered		Yes/Yes/Yes
Weight	g / oz	15 / 0.529

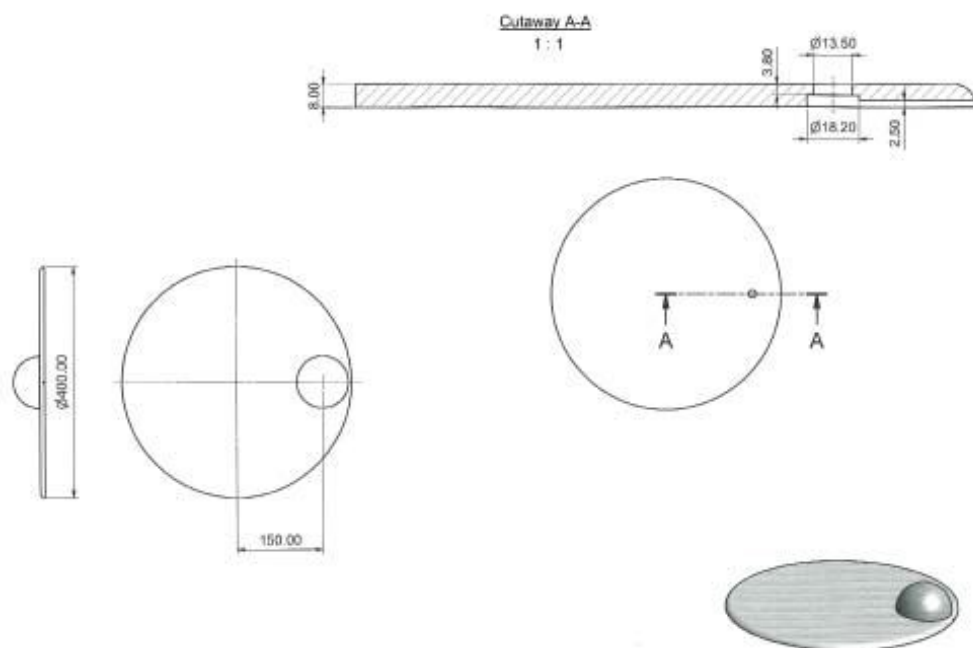

Placement of the microphone in the plate with the windscreen on top. The cutaway of section A to A shows how the microphone fits into the plate.

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Included items

GRAS 47AX-S1	1/2" CCP Flush-mounted Microphone Set
GRAS GR1425	Ground plate Ø400 mm
GRAS AM0375	Windscreen for 67AX
GRAS AA0097	3 m Microdot Angled – BNC cable

Optional accessories

GRAS 42AP	Intelligent Pistonphone, Class 0
GRAS RA0216	Pistonphone field-verification adapter
GRAS RA0221	Pistonphone calibration adapter

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

| We Make Microphones

Tradition

Since the establishment in 1994, GRAS has been 100% dedicated to developing and manufacturing high-quality measurement microphones and related acoustic equipment.

Innovation

We work with everybody with an interest in sound or noise within the fields of aerospace, automotive, audiology, consumer electronics, noise monitoring, building acoustics and telecommunications.

Quality

At GRAS we know that in order for you to trust your measurement results; signal quality, stability and robustness are essentials. We design and build them to perform under real life conditions – and beyond.

