

GRAS 40HL

1/2" LEMO Low-noise
Microphone System



Freq range: 10 Hz to 16 kHz
Dyn range: 6.5 dB(A) to 110 dB
Sensitivity: 850 mV/Pa

The GRAS 40HL 1/2" Low-noise Microphone System measures sound pressure levels down close to the threshold of human hearing. It is thus generally suitable for sound-power measurements on even very quiet products. Its very wide dynamic range permits measurements down to 6.5 dB re. 20 Pa (in 1/3-octave bands) from 20 Hz to 20 kHz.

Typical applications and use

- Measurements at very low sound pressure levels
- Measurements on hard-disk drives, computer products, anechoic rooms, quiet rooms, etc
- Sound-power measurements at low levels

Design

The 40HL comprises a special high-sensitive 1/2" free-field measurement microphone and an integrated 1/2" low-noise preamplifier. In combination, they connect to most high-quality input modules with LEMO 1B connector.

Preamplifier

The preamplifier, a true 1/2" low-noise amplifier with LEMO 1B connector, has a built-in compensation filter for free-field microphones.

Microphone

The 1/2" microphone is an externally-polarized free field microphone with a specially reduced inherent noise floor in order to achieve a high dynamic range and wide frequency range. Its diaphragm is specially tuned to yield high sensitivity coupled with low internal noise.


TEDS

The preamplifier of the 40HL has TEDS according to IEEE 1451.4. If your measurement platform supports TEDS you can read and write data like properties and calibration data.


Operating 40HL

For holding the microphone, you can order tripods and for level calibration of you need a pistonphone and Calibration Adapter attenuating the pistonphone signal to 94 dB re. 20 µPa. See the tab Ordering info.

| | | |
|--|---|-------------------------|
| Frequency range (± 1 dB) | Hz | 12.5 to 10k |
| Frequency range (± 2 dB) | Hz | 10 to 16 k |
| Frequency range (± 3 dB) | Hz | 6 to 20k |
| Dynamic range lower limit (microphone thermal noise) | dB(A) | 6.5 |
| Dynamic range upper limit | dB | 110 |
| Set sensitivity @ 250 Hz (± 2 dB) | mV/Pa | 850 |
| Polarization voltage | V | 200 V / Traditional |
| Microphone venting | | Rear |
| IEC 61094-4 Compliance | | WS2F |
| Output impedance | Ω | 47 |
| Temperature range, operation | $^{\circ}\text{C} / ^{\circ}\text{F}$ | -20 to 60 / -4 to 140 |
| Temperature range, storage | $^{\circ}\text{C} / ^{\circ}\text{F}$ | -40 to 85 / -40 to 185 |
| Temperature coefficient @250 Hz | dB/ $^{\circ}\text{C}$ / dB/ $^{\circ}\text{F}$ | -0,007 / -0,004 |
| Static pressure coefficient @250 Hz | dB/kPa | -0.01 |
| Humidity range non condensing | % RH | 0 to 95 |
| Humidity coefficient @250 Hz | dB/% RH | 0,001 |
| Influence of axial vibration @1 m/s ² | dB re 20 μPa | 63 |
| TEDS UTID (IEEE 1451.4) | | 27 v. 1.0 |
| Connector type | | 7-pin LEMO (FGG.1B.307) |
| CE/RoHS compliant/WEEE registered | | Yes / Yes / Yes |

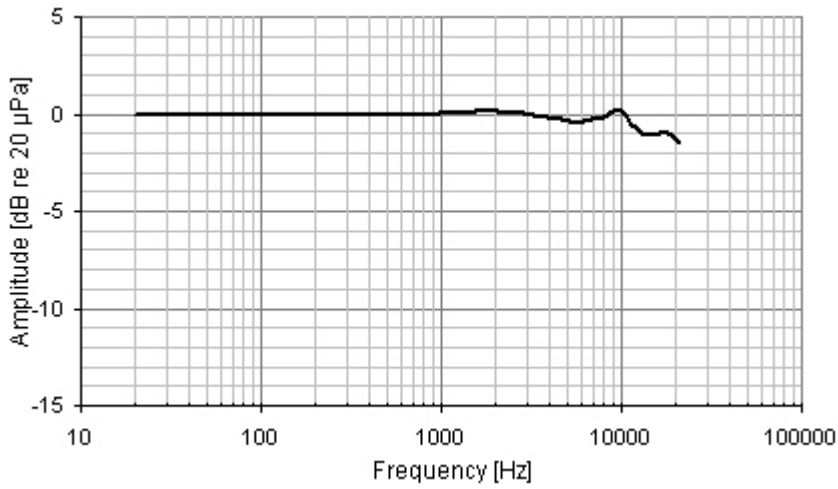

Typical frequency response

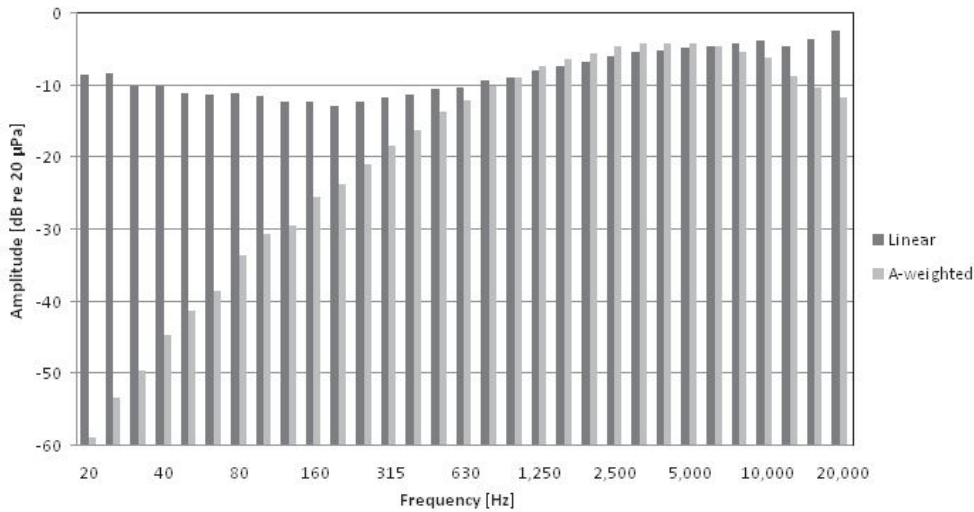

Typical noise floor shown in 1/3-octave bands - linear and A-weighted

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

Optional items

| | |
|--------------------------------|--|
| GRAS AA0008 | 3 m LEMO-to-LEMO cable* |
| GRAS AA0009 | 10 m LEMO-to-LEMO cable* |
| GRAS AA0020-CL | Customized length LEMO 7-pin - LEMO 7-pin Cable* |
| GRAS 12AD | 1-Channel Power Module |
| GRAS 12AR | 2-Channel Power Module |
| GRAS 12AA | 2-Channel LEMO Power Module with gain, filters and Syscheck generator |
| GRAS 12AK | 1-Channel Power Module with gain, filters and SysCheck generator |
| GRAS 12AQ | 2-Channel Universal Power Module with signal conditioning and PC interface |
| GRAS AL0006 | Tripod |
| GRAS RA0093 | Adjustable, high quality, stainless steel tripod adapter |
| GRAS AM0069 | Windscreen for 1/2" Microphones |
| GRAS 42AP | Intelligent Pistonphone, Class 0 |
| GRAS 42AA | Pistonphone, Class 1 |
| GRAS RA0090 | 94 dB Pistonphone Coupler |

*The cables also function as connection cables (to connect 40HL to a power module).

GRAS Sound & Vibration reserves the right to change specifications and accessories without notice.

| We Make Microphones

Tradition

Since the establishment in 1994, GRAS has been 100% dedicated to developing and manufacturing high-quality measurement microphones and related acoustic equipment.

Innovation

We work with everybody with an interest in sound or noise within the fields of aerospace, automotive, audiology, consumer electronics, noise monitoring, building acoustics and telecommunications.

Quality

At GRAS we know that in order for you to trust your measurement results; signal quality, stability and robustness are essentials. We design and build them to perform under real life conditions – and beyond.

